电查网（IC5.CN）— 百万电子工程师爱用电查网

Order this document
by MPSA42/D

High Voltage Transistors

NPN Silicon

MPSA42*
MPSA43

*Motorola Preferred Device





CASE 29–11, STYLE 1
TO–92 (TO–226AA)

MAXIMUM RATINGS

Rating	Symbol	MPSA42	MPSA43	Unit
Collector–Emitter Voltage	V_{CEO}	300	200	Vdc
Collector–Base Voltage	V_{CBO}	300	200	Vdc
Emitter–Base Voltage	V_{EBO}	6.0	6.0	Vdc
Collector Current — Continuous	I_C	500		mAdc
Total Device Dissipation @ T_A = 25°C Derate above 25°C	P_D	625 5.0		mW mW/°C
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	1.5 12		Watts mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–55 to +150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	200	°C/mW
Thermal Resistance, Junction to Case	$R_{\theta JC}$	83.3	°C/mW

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector–Emitter Breakdown Voltage(1) (I_C = 1.0 mAdc, I_B = 0)	 MPSA42 MPSA43	$V_{(BR)CEO}$	 300 200	 — —	Vdc
Collector–Base Breakdown Voltage (I_C = 100 μAdc, I_E = 0)	 MPSA42 MPSA43	$V_{(BR)CBO}$	 300 200	 — —	Vdc
Emitter–Base Breakdown Voltage (I_E = 100 μAdc, I_C = 0)		$V_{(BR)EBO}$	6.0	—	Vdc
Collector Cutoff Current (V_{CB} = 200 Vdc, I_E = 0) (V_{CB} = 160 Vdc, I_E = 0)	 MPSA42 MPSA43	I_{CBO}	 — —	 0.1 0.1	μAdc
Emitter Cutoff Current (V_{EB} = 6.0 Vdc, I_C = 0) (V_{EB} = 4.0 Vdc, I_C = 0)	 MPSA42 MPSA43	I_{EBO}	 — —	 0.1 0.1	μAdc

1. Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

Preferred devices are Motorola recommended choices for future use and best overall value.

REV 1

© Motorola, Inc. 1998

电查网（IC5.CN）— 百万电子工程师爱用电查网

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted) (Continued)

Characteristic		Symbol	Min	Max	Unit
ON CHARACTERISTICS(1)					
DC Current Gain		h_{FE}			—
(I_C = 1.0 mAdc, V_{CE} = 10 Vdc)			25	—	
(I_C = 10 mAdc, V_{CE} = 10 Vdc)			40	—	
(I_C = 30 mAdc, V_{CE} = 10 Vdc)			40	—	
Collector–Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 20 mAdc, I_B = 2.0 mAdc)	MPSA42		—	0.5	
	MPSA43		—	0.4	
Base–Emitter Saturation Voltage		$V_{BE(sat)}$	—	0.9	Vdc
(I_C = 20 mAdc, I_B = 2.0 mAdc)					
SMALL–SIGNAL CHARACTERISTICS					
Current–Gain — Bandwidth Product		f_T	50	—	MHz
(I_C = 10 mAdc, V_{CE} = 20 Vdc, f = 100 MHz)					
Collector–Base Capacitance		C_{cb}			pF
(V_{CB} = 20 Vdc, I_E = 0, f = 1.0 MHz)	MPSA42		—	3.0	
	MPSA43		—	4.0	

1. Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

电查网（IC5.CN）— 百万电子工程师爱用电查网

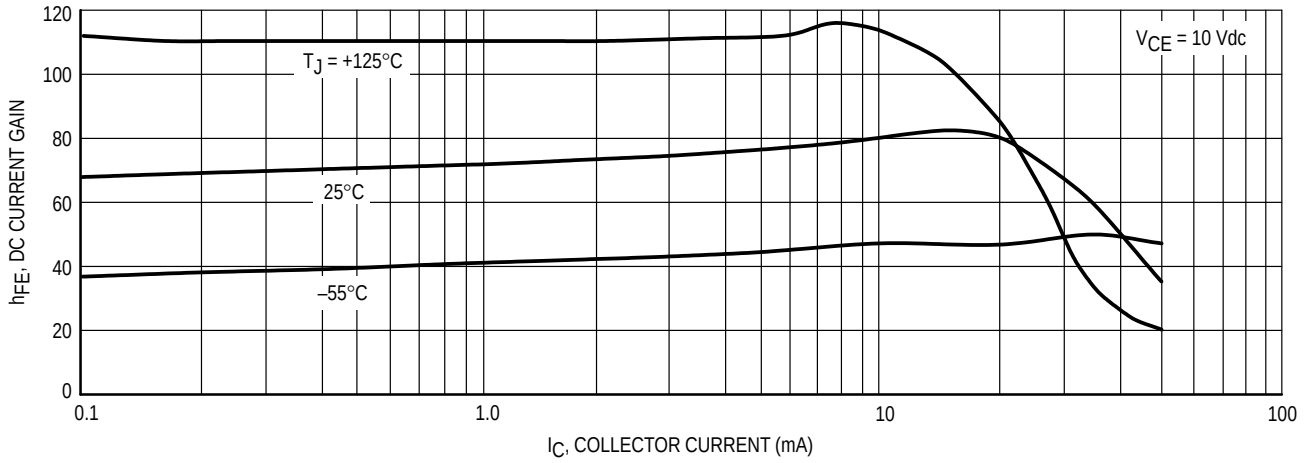

Figure 1. DC Current Gain

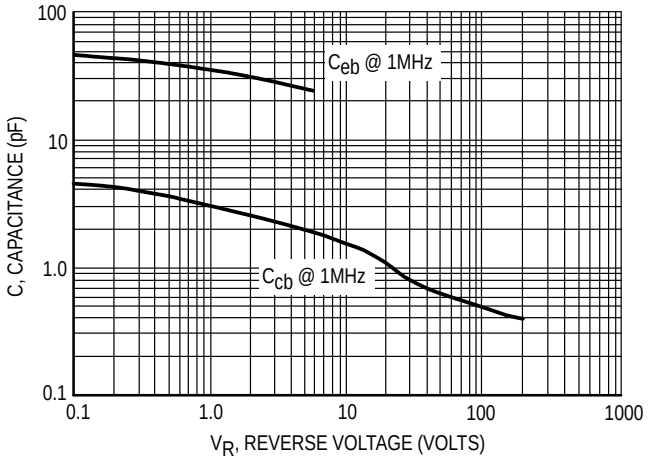

Figure 2. Capacitance

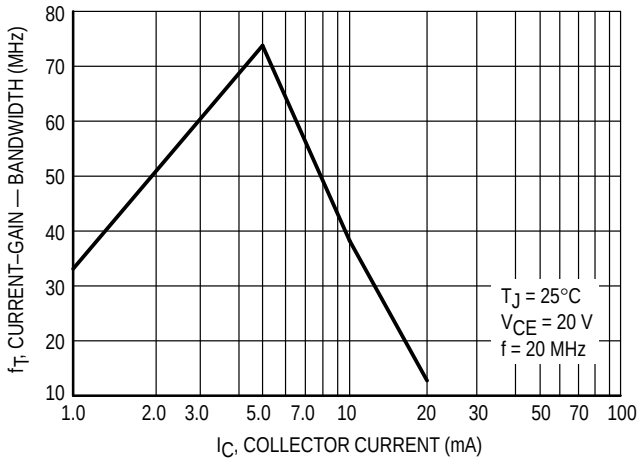

Figure 3. Current–Gain – Bandwidth

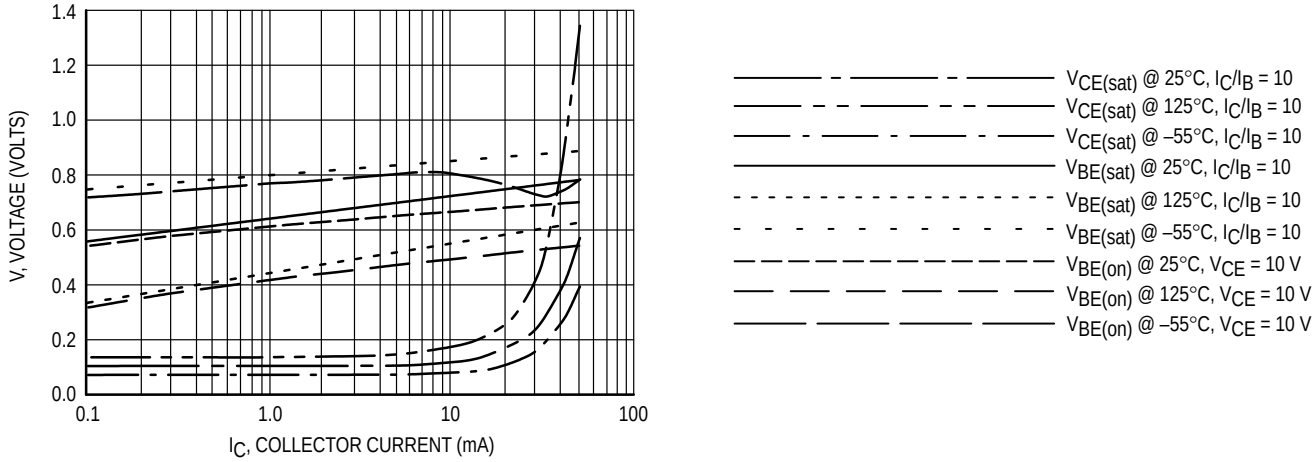

Figure 4. "ON" Voltages

电查网（IC5.CN）— 百万电子工程师爱用电查网

PACKAGE DIMENSIONS

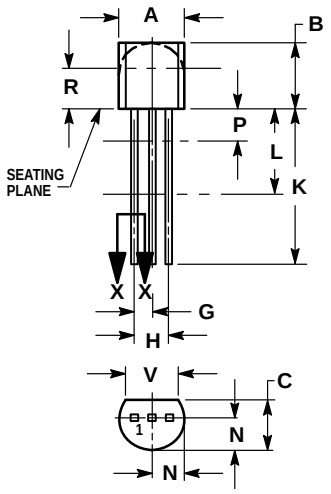



SECTION X–X

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. CONTOUR OF PACKAGE BEYOND DIMENSION R IS UNCONTROLLED.
4. LEAD DIMENSION IS UNCONTROLLED IN P AND BEYOND DIMENSION K MINIMUM.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.175	0.205	4.45	5.20
B	0.170	0.210	4.32	5.33
C	0.125	0.165	3.18	4.19
D	0.016	0.021	0.407	0.533
G	0.045	0.055	1.15	1.39
H	0.095	0.105	2.42	2.66
J	0.015	0.020	0.39	0.50
K	0.500	—	12.70	—
L	0.250	—	6.35	—
N	0.080	0.105	2.04	2.66
P	—	0.100	—	2.54
R	0.115	—	2.93	—
V	0.135	—	3.43	—

CASE 029–11
(TO–226AA)
ISSUE AJ

STYLE 1:
PIN 1. EMITTER
2. BASE
3. COLLECTOR

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. “Typical” parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including “Typicals” must be validated for each customer application by customer’s technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and Ⓜ are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Mfax is a trademark of Motorola, Inc.

How to reach us:
USA / EUROPE / Locations Not Listed: Motorola Literature Distribution;
P.O. Box 5405, Denver, Colorado 80217. 1–303–675–2140 or 1–800–441–2447

JAPAN: Nippon Motorola Ltd.; SPD, Strategic Planning Office, 141,
4–32–1 Nishi–Gotanda, Shinagawa–ku, Tokyo, Japan. 81–3–5487–8488

Customer Focus Center: 1–800–521–6274

Mfax™: RMFAX0@email.sps.mot.com – TOUCHTONE 1–602–244–6609
Motorola Fax Back System – US & Canada ONLY 1–800–774–1848
– http://sps.motorola.com/mfax/

ASIA / PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852–26629298

HOME PAGE: http://motorola.com/sps/

电查网 www.ic5.cn

地球上最全的电子元器件资料查询网站，1500多万种型号，
与主流厂商同步更新。没错，这就是电查网！！！