Package

□indoor unit
□adaptor (15V/1.2A)
□manual
□small parts
□gift box
□rain cover
□outdoor station
□5m cable
□mounting plate

7” COLOR TFT LCD VIDEO DOOR PHONE

INSTRUCTIONS MANUAL

Before attempting to operate this product please read this manual carefully and completely.

TABLE OF CONTENTS

Product introduction……... (一)
Parts introduction…….. …..(一)
Operation……..(二)
Installation……(三)
Technical Specifications……...(四)
Work environment……....(五)
Maintenance……(六)
Cautions……....(七)
Accessories……...……(八)
Technical support……...…...(九)
Warranty……...….(十)

Note: This manual is used for introducing operation, the real item maybe different with illustration due to version upgrades and production of different batches. If any difference, please take the machine as the standard.

Cautions

1. Do not mount the indoor unit near any location of high temperature or humidity including televisions.	
2. Do not allow the unit to be in contact with water including touching with wet hands.	
3. When cleaning do not use aggressive chemicals or corrosive liquids use only a soft cloth.	
4. Avoid sudden shocks to the units.	
5. Avoid positioning the camera in strong sunlight, otherwise the image will be faint.	

Installation

1. Indoor Unit Installation:

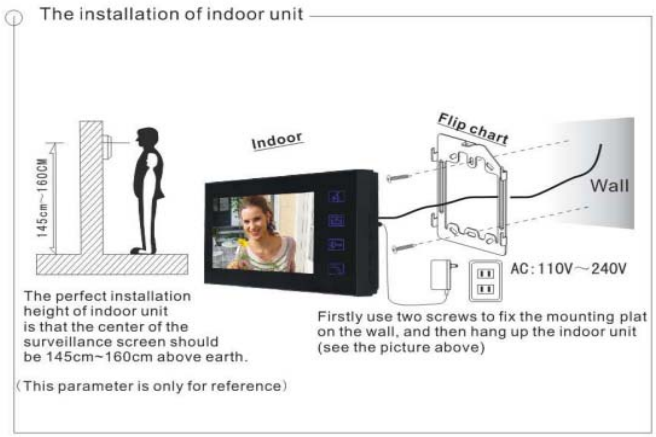

2. Outdoor Station Installation:

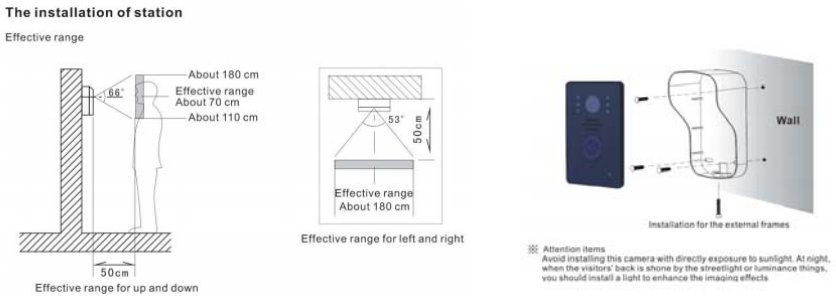

Product introduce

1. 7inch color monitor with ultra-slim design and full-touch screen, nice and luxurious
2. Weather proof, oxidation proof, durable alloy outdoor door station, supporting embedded and hanging installation.
3. High sensitive touch technology(with voice hint)
4. No radiation, low consumption and high resolution
5. Monitor, intercom, unlock, hand-free and multy melody.
6. Able to connect with 2 electronic lock.
7. Volume, brightness and contrast adjustable..
8. with adaptor can cable, easy to install.
9. Max: 1camera+6 monitors; 2 cameras+6 monitors.

Appearance of product & parts

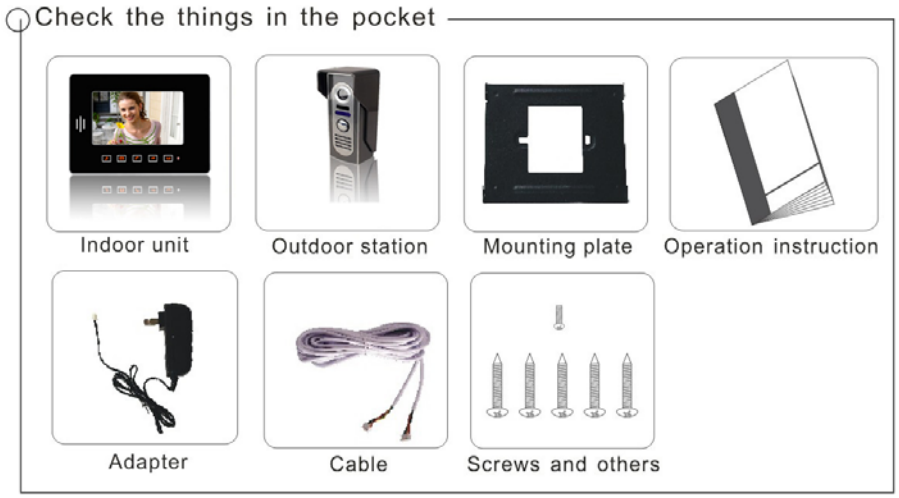

Operation instruction:

Connect cable, E-lock and power supply as this menu,
Then press monitor button and open outdoor monitor screen, enter function menu to adjust the brightness/contrast for best effect.

Visitors Calls

The visitor presses the CALL button on the outdoor door station, the internal monitor will ring and the visitor will be seen, the host can talk to the visitor by pressing the TALK button once and the conversation can last 120s. The host can press the UNLOCK button to open the door, and then press the MONITOR/TALK button to end current conversation and enter standby mode automatically.

Viewing the outside (60 seconds duration)

Pressing MOINTOR from the installed monitor will switch on the outdoor door station 1 and view of the outside will be seen on the screen, keep pressing the MONITOR for 1s, then shift for outdoor station 2. Pressing MONITOR again will cancel the outdoor monitoring.

Choosing melody

Press melody button under monitor state to select prefer melody.

Unlock function

Press the UNLOCK button at any time to open the electric lock.

Unlock the second lock

Press the UNLOCK (indoor) button to unlock the lash-up lock (less than 500ma) and it is 5s delay. This also can be used for unlock the additional outdoor lock.

Connection

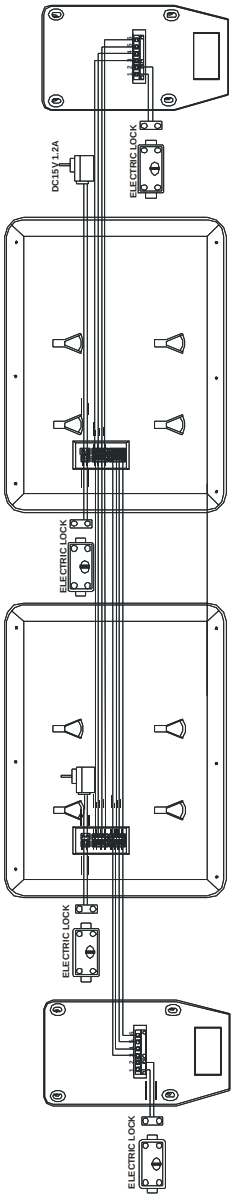

SPECIFICATIONS

Outdoor Station		Indoor Unit	
Power		Power	input ： AC 100-240V 50/60Hz output：DC 15V/1.2A
Camera	CMOS 30M pixels	LCD	7”TFT 960×480
LED	6pcs	Valid area	154.08(H) ×86.58(V)
Consumption	Standby:0.1W ；work:12W	Consumption	Standby:0.5W；work:8W
Valid distance	80m (4*0.5MM2)	Calling duration time	120s±10%
Angle	92 degree	Monitor time	60s±10%
Work temperature	-10℃ - +50℃	Work temperature	-10℃ - +50℃
Size	125×52×30MM	Size	240×160×26MM

DESCRIPITION OF INDOOR & OUTDOOR UNIT

1. Indoor unit

Front:

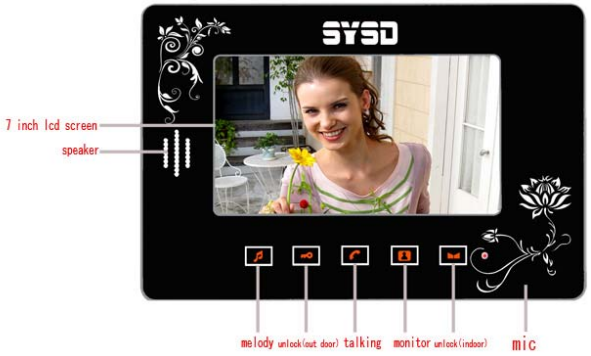

Back:

Side:

2. Outdoor Station

Front:

Back: